



A U S T R A L I A

Whiting Insulated Freezer Door (-7°C and below) Model: Tempsave 50 Safeguard



Roller Shutter Truck Doors

The Whiting TS 50 Safeguard is an insulated freezer door with 'fingerguard' safety. Infinitely robust in design and reliable, it provides customers with one of the finest shutter doors for trucks and trailers, even in the harshest of environments.

Features

- Incorporating 'fingerguard' safety feature to help prevent fingers being placed between the panels when closing
- All stainless steel hardware and hinges
- Bolt on roller retainers for easy change of rollers to minimise downtime and maintenance costs
- The enclosed twin spring balancer helps reduce load contamination from rotating torsion springs
- Independent twin stainless steel cables fitted to every shutter door (Lloyds certified)
- Twin spring balancer provides added reliability and independent lifting capabilities for each individual cable
- Large 50mm diameter sealed steel rollers with stainless steel shafts and noise reducing provide extra strength and longer life (twice the life of a 25mm diameter roller)
- Shutter panels are insulated with polyurethane (CFC) free foam
- 50mm thick extruded 18mm thick aluminium panels with 178mm reinforcement ribs inside and out provide a tough long life
- Spring loaded lock catch provides consistent lock tension and maximum security
- Effective long-life and durable side, top and bottom seals
- Track fixing holes pre-punched
- Extruded aluminium panels are polyester powder coated white RAL 9010 on the inside and outside as standard



External view



Showing incorporated 'fingerguard' hinge

Questions?

Call Southern States Group for more information.

Southern States Group reserves the right to modify, without notice, the technical and aesthetic characteristics of the product.




4-6 Burns Road, Altona VIC 3018 | PO Box 22 Altona North VIC 3025 | T +61 3 8689 7111 | F +61 3 8689 7112 | W ssgroup.com.au

ABN 83 061 204 073 | AU00306



A U S T R A L I A


Whiting Insulated Freezer Door (-7°C and below) Model: Tempsave 50 Safeguard

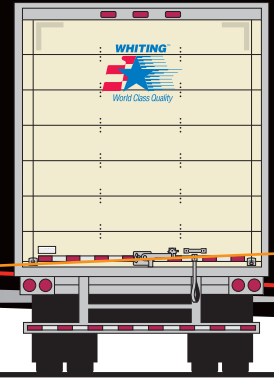

Features




Dual spring balancer for added reliability and independent cable tension.




Dual durometer top seal for maximum thermal performance.



Enclosed spring balancer for added reliability and reduction of load contamination from rotating torsion springs.



Mounting angle & side seal. The side seals are effective throughout the full operating cycle.

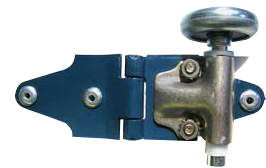

Stainless steel end hinge and roller carrier. Removable cap allows roller change without removing hinge.



Large 50mm diameter steel roller for extra strength and long life.



Stainless steel top closure arm designed to eliminate the need for having two tracks to carry top section.



No.77 spring tension loaded lock complete with keeper for maximum security.



Recessed internal release handle for safety.

Options

- Electrolift powered operation available

Questions?

Call Southern States Group for more information.

Southern States Group reserves the right to modify, without notice, the technical and aesthetic characteristics of the product.

