

FK 2

# TOMORROW'S TECHNOLOGY TODAY

More and more cities are – rightfully – implementing environmental legislation to improve inner-city living conditions. Low Emission Zones (LEZs) are areas where the most polluting vehicles are regulated.

Vehicles (and refrigeration units) that don't meet a certain emission threshold aren't allowed to enter these specific zones. Increasingly, European cities are enforcing LEZs: Antwerp, Amsterdam, Paris, Vienna, Budapest, ... to name a few. London even went the extra mile and implemented an Ultra-Low Emission Zone.



Fortunately, the FK 2's revolutionary new design reflects how it pushes forward-thinking businesses to set up clean distribution routes across Europe while optimizing operations based on data insights.

#### The result?

A brand new 100% electric solution with no direct CO<sub>2</sub> emissions that lets you enter the city now – and in the future.





#### GENERATE MORE UPTIME

Compared to traditionally more complex diesel units, FRIGOBLOCK 100% electric units require fewer maintenance thanks to its hardwearing components.

But that didn't stop us from improving the architecture of our FK 2 to make it even more reliable. The FK 2 conceptual design allows for high-quality repair and maintenance activities. These small yet impactful changes will give you more uptime. And that is why the FRIGOBLOCK refrigeration machines are:

- Subjected to extensive testing full-scale function and leak tests
- Fail-safe machine and alternator
   With 40+ years of experience
- Increased serviceability
   revolutionary design allows better
   access to internal components

FRIGOBLOCK

## EFFICIENCIES THAT **SAVE YOU MONEY**

Reduced fuel consumption, more efficient use of electricity and engineered to increase uptime. FRIGOBLOCK's innovative FK 2 is designed to generate operational efficiencies that save you money. Even better, it's easy access to internal components and ultra-reliable mechanics mean that even repair or scheduled maintenance will be quick and efficient.

### **TURN DATA INTO** PRACTICAL INTELLIGENCE

Refrigerated transport is changing. Simply keeping your load at temperature until it reaches the customer is no longer the last word. Luckily, the FK 2 goes above and beyond: Remote monitoring of vehicle, driver and refrigeration performance put you in complete control of the deliveries your customers rely on. Data you can analyze and use to optimize your operations into the future.



#### SEE. KNOW. GROW. WITH THERMO KING **TELEMATICS: CONNECTED SOLUTIONS**

Turn driving data into practical intelligence with Connected Solutions, Thermo King's telematics software and hardware. It delivers the information that matters to you most.


Putting this data to work gives you the ability to track & trace individual deliveries across your fleet. You'll be able to demonstrate temperature levels, meet regulatory requirements, and respond instantly to new challenges.

## TRACK YOUR CARGO **24/7**

The **FK 2** is the very first FRIGOBLOCK unit with the possibility to be equipped with a Bluebox (Thermo King's telematics), directly from the factory. This enables you to demonstrate the condition of your cargo at all times.

- Visibility of key operational metrics including driver behavior and temperature
- Information and alerts on the condition of individual cargoes
- Real-time access to load temperature out on the road





## **ALTERNATOR**

### **CAPTURE**LOST ENERGY

Braking, accelerating, stopping, starting... A lot of the energy is lost when your vehicles are on the road. Energy that you could re-use to keep your load at optimum temperature. Our solution? Our pioneering alternator technology.


Since the foundation of FRIGOBLOCK, alternators have been the driving technology for generating electricity. Like an electric generator, the alternator is integrated in the belt drive of the truck engine. As the truck engine revs up, the rotary frequency of the alternator increases and generates voltage and amperage.

- Low noise, high powered performance
- Cutting edge technology for truck cooling - an unlimited source of energy
- Tractor independent for easy integration into your fleet.

#### HOW DOES IT WORK

A high-performance alternator is directly driven by the vehicle engine. The alternator supplies electricity with minimal energy transfer losses. In the case of a HV e-truck, the electricity is supplied by the battery pack.

The Power generated passes to the full electric unit via an inverter. The inverter modulates the current so that the electric motors for compressor and fans can operate with optimum control and efficiency.

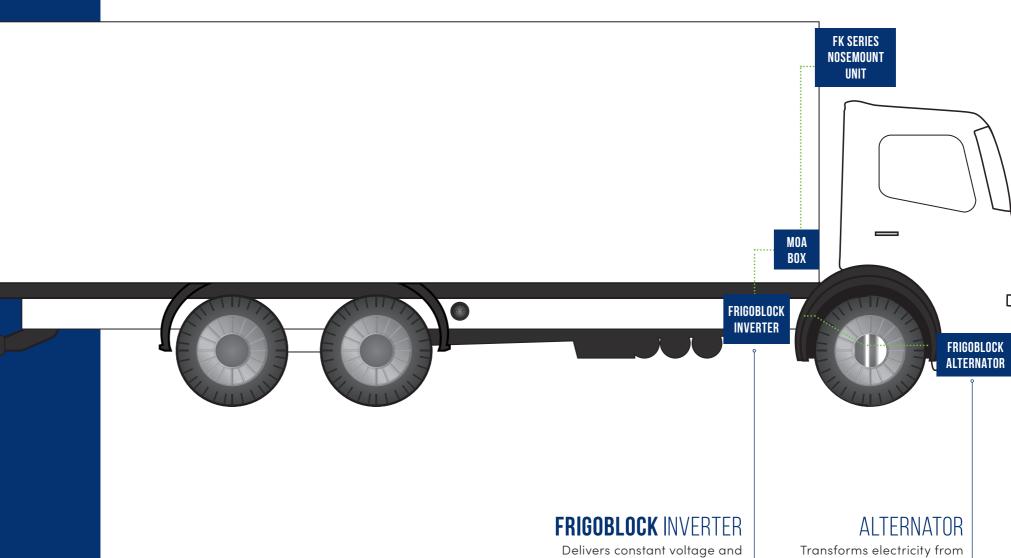

frequency to the unit regardless of vehicle engine speed. Guarantees rapid start-up of the unit with low mechanical stress. Provides optimum load temperature control with minimum power consumption.

Transforms electricity from alternator to power the FK refrigeration unit.

## TECHNICAL INFORMATION

#### FK 2 **SINGLE TEMP**

Integrated Evaporators			1		
Return air / ambient temperature		°C	0 / 30	-20 / 30	
Refrigeration Capacity	Road Mode	W	15.500	9.050	
	Standby Operation	W	14.520	8.560	
Defrost Capacity (Hotgas)		W	up to 32000		
Heating Capacity (Electric)		W	8.200		
Refrigerant			R 410A		
Airflow		m³/h	4.150		
Unit Weight		kg	335		
Condenser Dimensions (H+W+D)		mm	645 x 2365 x 780		
Compressor					
Cylinders			4		
Displacement		m³/h	43,68		

FRIGOBLOCK

2365 mm

TRANSPORT REFRIGERATION UNIT


#### FK 2 **MULTI TEMP**

RE Series		RE 11-2		RE 22-2		RE42-1		RE 44-2		
Return air / ambient temperature °C		°C	0/30	-20 / 30	0 / 30	-20 / 30	0/30	-20 / 30	0 / 30	-20 / 30
Individual Refrigeration Capacity St	Road Mode	W	10.600	6.170	13.290	7.155	12.810	7.305	15.900	9.330
	Standby Operation	W	10.310	5.800	13.010	6.570	12.360	7.130	15.080	8.800
Airflow		m³/h	1.9	900	3.800		4.000		6.500	
Evaporator Fans				1	2		2		4	
Discharge			Dual		Dual		Single		Dual	
Dimensions										
Height*		mm	160		160		140		140	
Length		mm	1.120		1.120		680		1.020	
Width		mm	720		1.160		2.160		2.160	
Weight kg		46		74		52		92		

<sup>\*</sup> can be recessed 40mm into the roof

#### ALTERNATORS

			G 17	G 24	AW 22,5	AW 30
Power		kVA	17,3	24,2	22,5	30
Voltage		٧	400	400	400	400
Current		Α	25	35	32	43
Speed	F	RPM	3.000	3.000	3.000	3.000
Dimensions						
Length	1	mm	460	560	336	411
Height	I	mm	214	214	187	187
Width	I	mm	245	245	187	187
Shaft	I	mm	43	43	30	30
Weight		kg	76	98	49	60

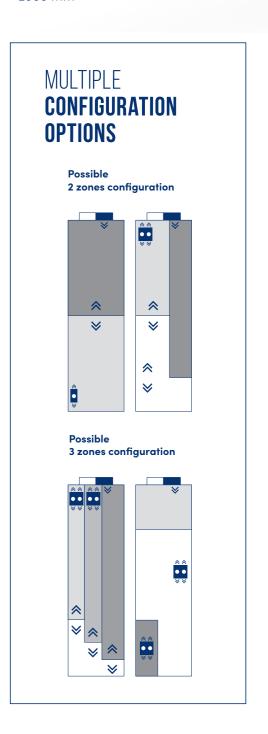

780 mm

645 mm



### **4 REASONS TO CHOOSE** THE ALL NEW FK 2

- Industry-leading connectivity with practical data
- Constructed for sustainable ambitions
- Revolutionary design for more uptime
- 100% electric highly performant unit

FRIGOBLOCK is a brand of Thermo King®. Thermo King – by Trane Technologies (NYSE: TT), a global climate innovator – is a worldwide leader in sustainable transport temperature control solutions. Thermo King has been providing transport temperature control solutions for a variety of applications, including trailers, truck bodies, buses, air, shipboard containers and railway cars since 1938.

E ∘ FB 2030